


ASSEMBLY INSTRUCTIONS

1. Fix the lamp body (A) to the canopy (B) and secure with the nuts (C).
2. Wiring for the switch (D): connect the 4.72-inch short black wire from the switch with the short black wire of the light fixture and connect the 9.84-inch long black wire from the switch with the live wire.
3. Attach the mounting plate (E) to the outlet box using the screws (F) to secure.
4. Loosen the hex nuts around the bolts (G) and screw in or unscrew the bolts from the junction box to get the right length for installation.
5. Connecting the power cords (H): connect the black wire with black wire and white wire with white wire with the wire nuts. Turn the wire nuts to twist the wires together. Wrap the wire nuts with insulated rubber tape.
6. Attach the lamp body (B) to the mounting plate (E) using the ball nuts (J) to secure.
7. Screw the bulb (K) into the lamp holder.
8. Screw the lampshade (L) into the lamp body.

Please consult a qualified Electrician if you are not familiar with electrical wiring.

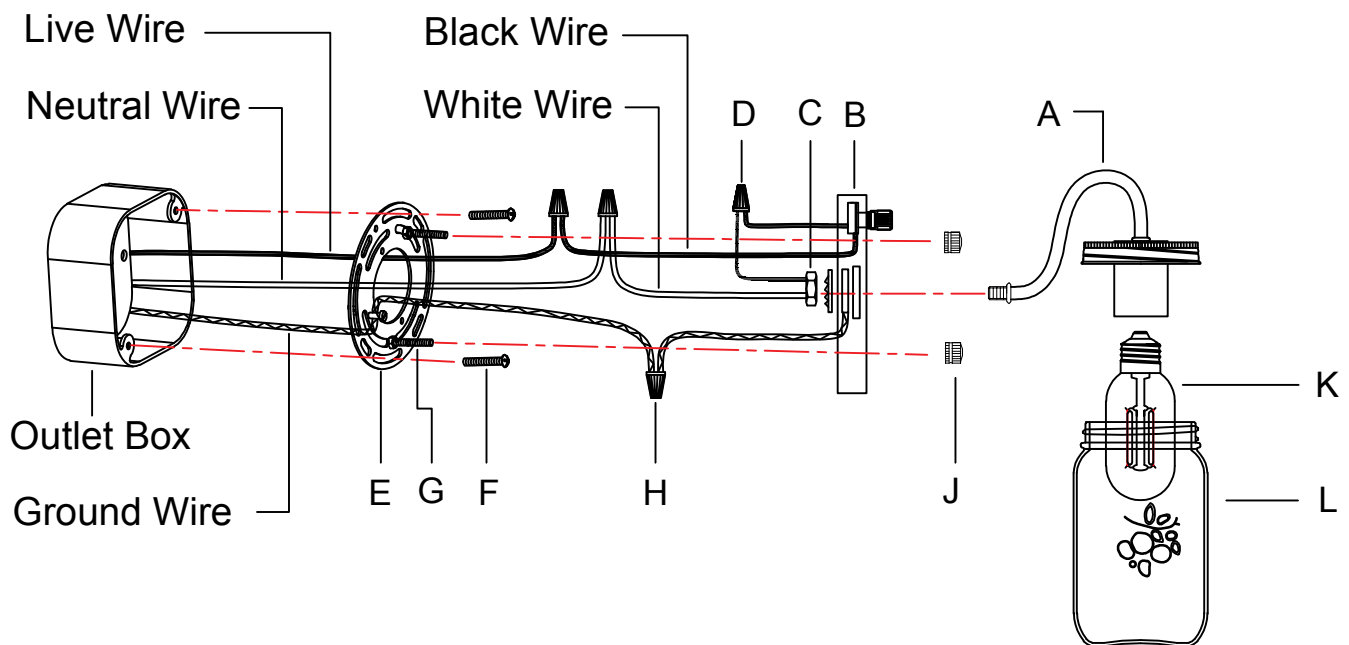

Recommended bulb shape

