

Ceiling Light User Manual

Model: B7317-3CU


Voltage: 120V/60Hz

Wattage: MAX 60W*3Bulbs

Base: E26 (Bulb Not Included)

Material: Metal/Glass

Fixture Color: Black/Gold

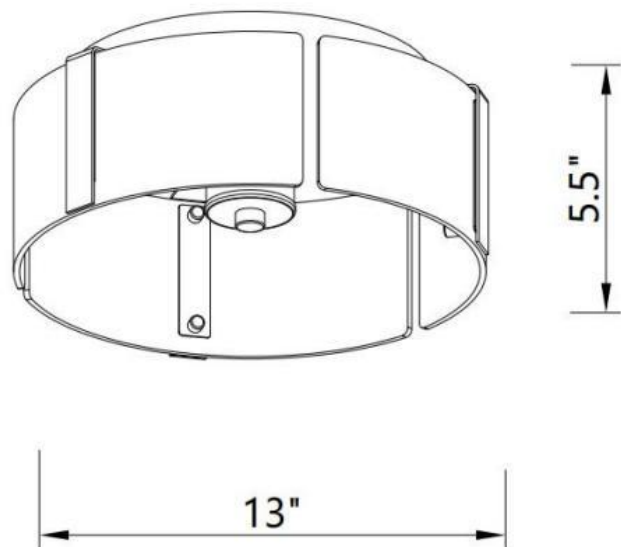

SAFETY INFORMATION

This product must be installed in accordance with the applicable installation instructions by a person who is familiar with the construction and operation of the product and the hazards involved. Use minimum 90°C supply conductors.

WARNING: Read all safety precautions and installation instructions carefully before installing this fixture. Failure to comply with these Instructions could result in a potentially electric shock and/or property damage.

TO reduce the risk of electrical shock or other personal injury ensure the power is turned OFF at the fuse or breaker box before making any electrical connections.

For indoor use only .

It must be connected to 110- 120 volt, 60Hz power source.


Fixture should be mounted to a grounded junction box marked for use in wet locations.

The fixture should be installed by a qualified electrician.

Wiring the electrical system, and method of electrical connection of the fixture, must be in accordance with the National Electrical Code and local building codes.

PLEASE CHECK ALL INCLUDED ACCESSORIES:

Carefully remove the fixture from the box and see if all parts are included. Be careful not to misplace any of the screws or parts needed for installing the fixture.



Fixture




CrossBar 1pc



Decorative
Caps2pcs



Shade fixed
support 3PCS

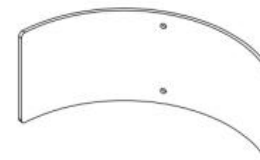

Glass Shades 3pcs



OutletBox
Screws3PCS



Wire Connectors
3PCS

INSTALLATION


CAUTION: Turn OFF the circuit breaker and **Light Switch** before starting installation to prevent electrical shock.

INSTALLATION STEPS


Step 1 、 Unscrew the **Decorative Cap** and remove the **CROSS BAR** bar from the fixture.

Attach the **Cross Bar** to the **Junction Box** using the mounting screws;

Step 2 、 Attach the **Lampshade Brackets** *3 pcs to the canopy using the provided screws;

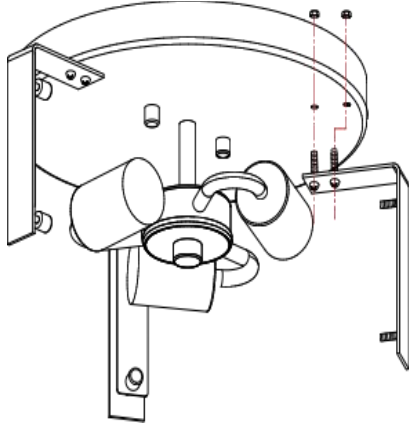

Step 3 、 Carefully attach the **Glass Lampshades***3 pcs to the Brackets. Ensure each glass piece is properly aligned and securely fastened.

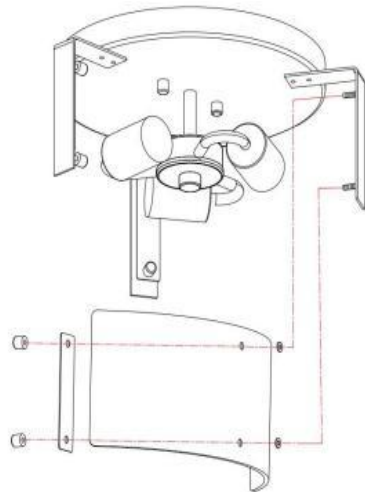

ASSEMBLY INSTRUCTIONS

1.Install the mounting plate (A) on the outlet box with the screws (B).


2.Loosen the hex nuts around the bolts (C) and screw in or unscrew the bolts from the junction box to get the right length for installation.

3.Connect the fixture wire to the circuit wire with the wire nuts (D):black wire with live wire, white wire with neutral wire, ground wire with ground wire. Turn the wire nuts to twist the wires together. Wrap the wire nuts with insulated rubber tape.

4. Fix the canopy (E) to the mounting plate (A) with the ball nuts (F).

5. Screw the bulb (G) into the lamp holder.

Please consult a qualified Electrician if you are not familiar with electrical wiring.

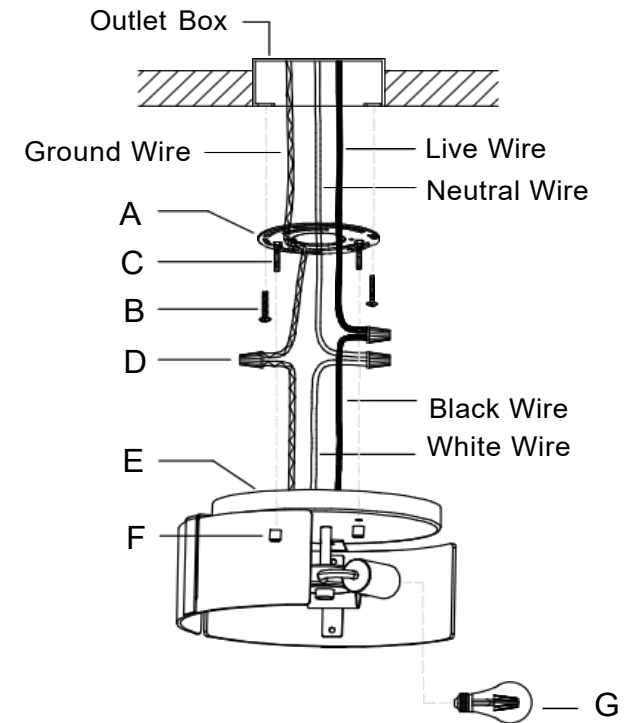

Recommended bulb shape

