


ASSEMBLY INSTRUCTIONS

1. Install the mounting plate (A) on the outlet box with the screws (B).
2. Loosen the hex nuts around the bolts (C) and screw in or unscrew the bolts from the junction box to get the right length for installation.
3. Connect the fixture wire to the circuit wire with the wire nuts (D): black wire with live wire, white wire with neutral wire, ground wire with ground wire. Turn the wire nuts to twist the wires together. Wrap the wire nuts with insulated rubber tape.
4. Fix the canopy (E) to the mounting plate (A) with the ball nuts (F).
5. Place the lamp shade (G) on the socket and secure with the socket ring (H).
6. Screw the bulb (J) into the lamp holder.

Please consult a qualified Electrician if you are not familiar with electrical wiring.

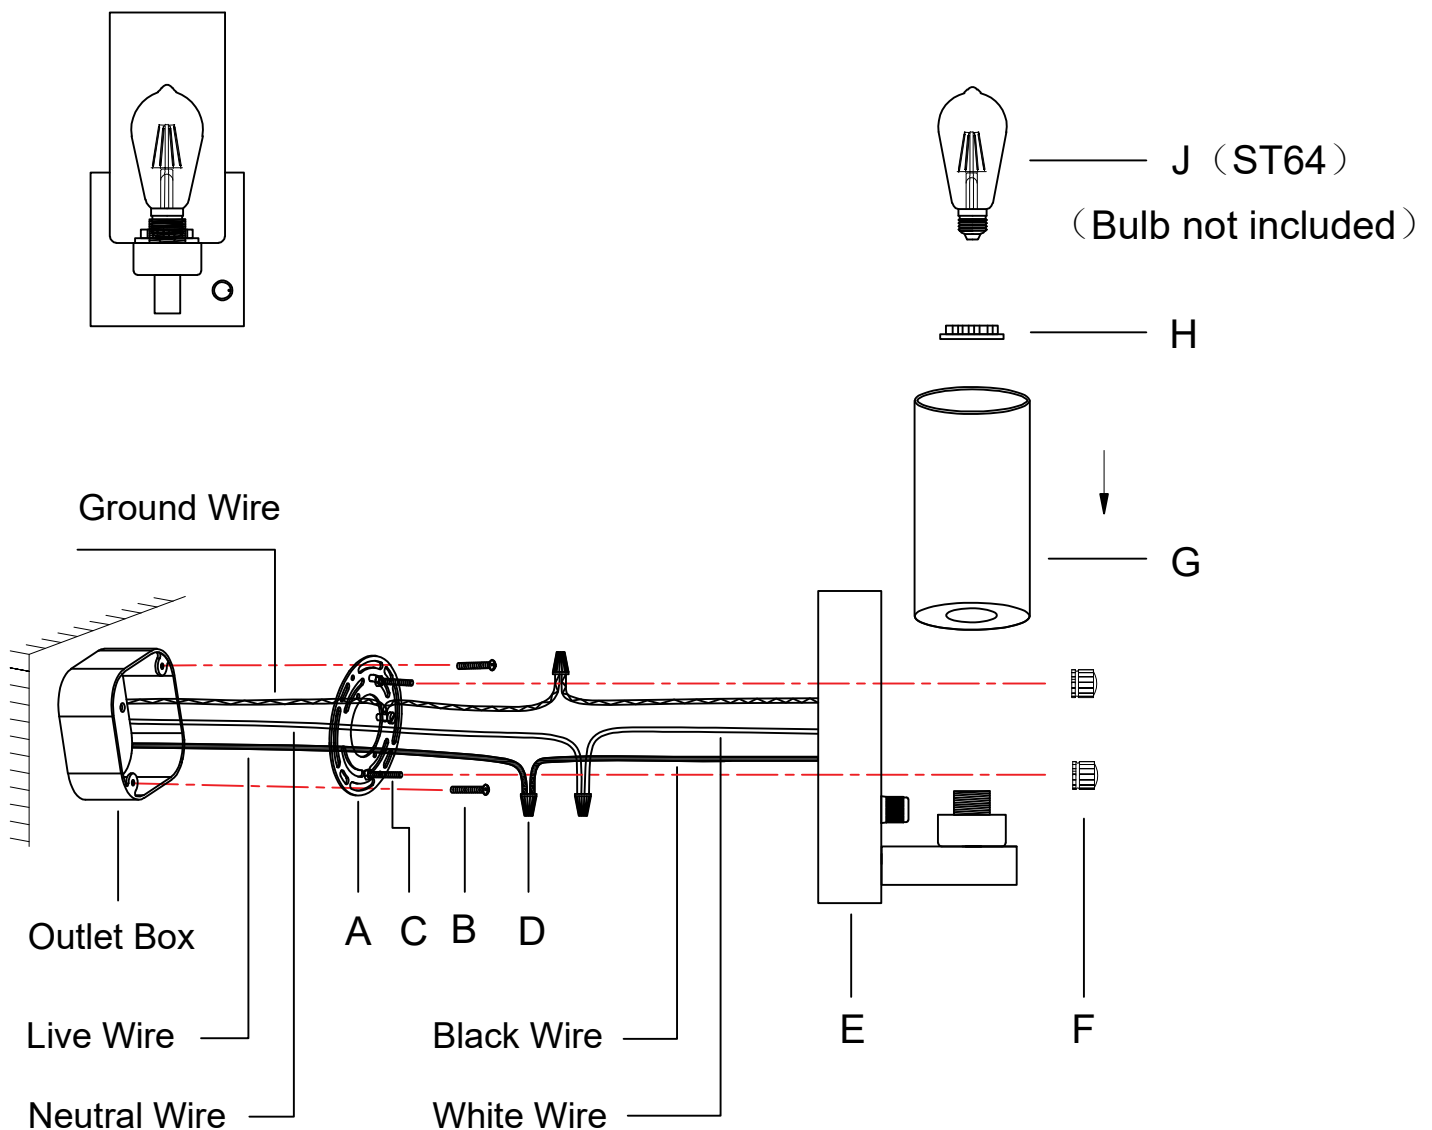

1. The built-in dimmer is only suitable for LED light sources in thyristor dimming mode, with a maximum power of 50W.
2. The dimming range may vary due to compatibility between the bulb and the dimmer, typically ranging from 30% to 100%.