



Model No: B3370-2BU

ASSEMBLY INSTRUCTIONS

1. Fix the lamp body (A) to the canopy (B) and secure with the nuts (C).
2. Install the mounting plate (D) on the outlet box with the screws (E).
3. Loosen the hex nuts around the bolts (F) and screw in or unscrew the bolts from the junction box to get the right length for installation.
4. Connect the fixture wire to the circuit wire with the wire nuts (G): black wire with live wire, white wire with neutral wire, ground wire with ground wire. Turn the wire nuts to twist the wires together. Wrap the wire nuts with insulated rubber tape.
5. Fix the canopy (B) to the mounting plate (D) with the ball nuts (H).
6. Put the glass shade (J) around the lamp holder, put the rubber band (K) around the lamp holder, and put the rubber band on the bottom of the glass shade. Then put the socket cup (L) on top of the rubber band. Put the socket ring (M) into the socket spanner (N) and screw the socket ring into the lamp holder to secure the glass shade with the socket spanner.
7. Screw the bulb (O) into the lamp holder.

Please consult a qualified Electrician if you are not familiar with electrical wiring.

Recommended bulb shape

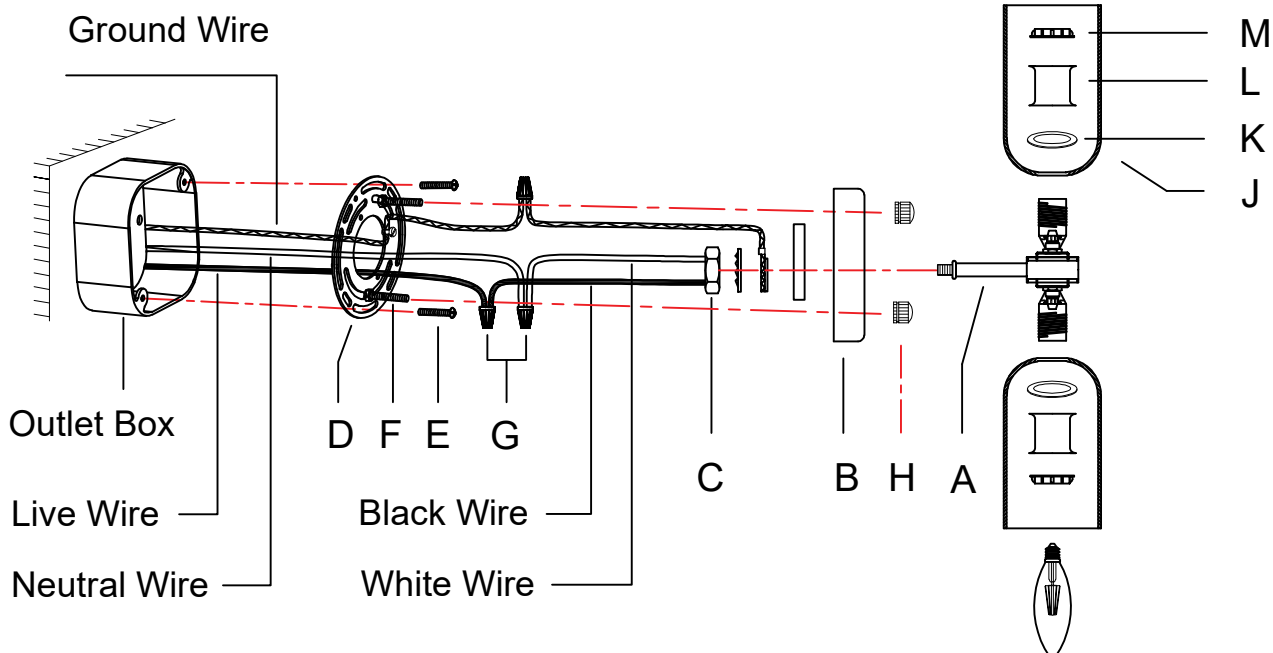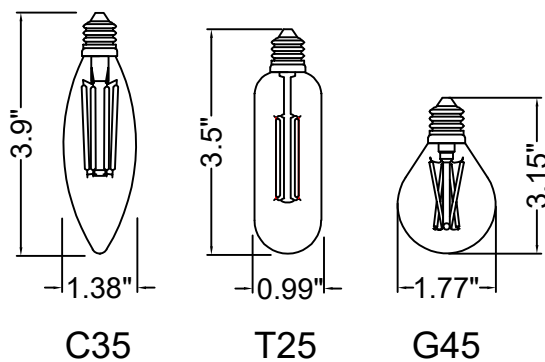

In view of thermal expansion and contraction, avoid securing the glass shade too tight when screwing the socket ring into the lamp holder, or you will break the glass shade.