
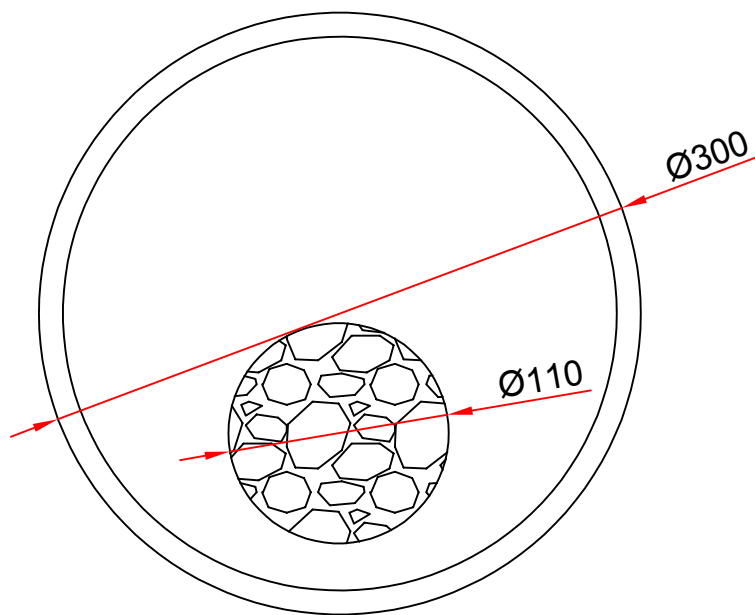


T7282CU-J

T7282CU-WW

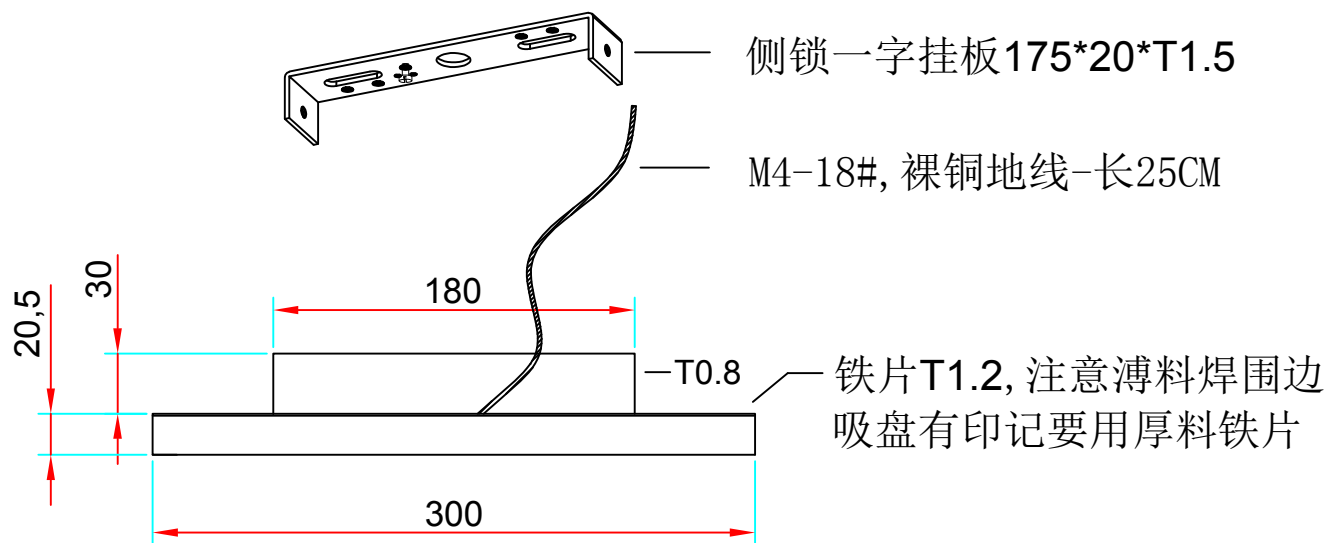

1. 隔离恒流电源-无频闪:AC85-265V-50/60Hz 输出:DC54-100V-250mA
LED-18W-显指 ≥ 80
2. 驱动输入线美规UL-18-20#-105度黑白线-长25CM, 尾部半剥10MM。