



ASSEMBLY INSTRUCTIONS

1. Fix the lamp body (A) to the canopy (B) and secure with the nuts (C).
2. Wiring for the switch (D): connect the 4.72-inch short black wire from the switch with the short black wire of the light fixture and connect the 9.84-inch long black wire from the switch with the live wire.
3. Install the mounting plate (E) on the wall with the screws (F).
4. Loosen the hex nuts around the bolts (G) and screw in or unscrew the bolts from the junction box to get the right length for installation.
5. Connect the fixture wire to the circuit wire with the wire nuts (H): black wire with live wire, white wire with neutral wire, ground wire with ground wire. Turn the wire nuts to twist the wires together. Wrap the wire nuts with insulated rubber tape.
6. Fix the canopy (B) to the mounting plate (E) with the ball nuts (J).
7. Place the lamp shade (K) on the socket and tighten it with the socket ring (L).
8. Attach the metal wire cage (M) to the metal barn shade (K) using the screws to secure.
9. Screw the bulb (N) into the lamp holder.

Please consult a qualified Electrician if you are not familiar with electrical wiring.

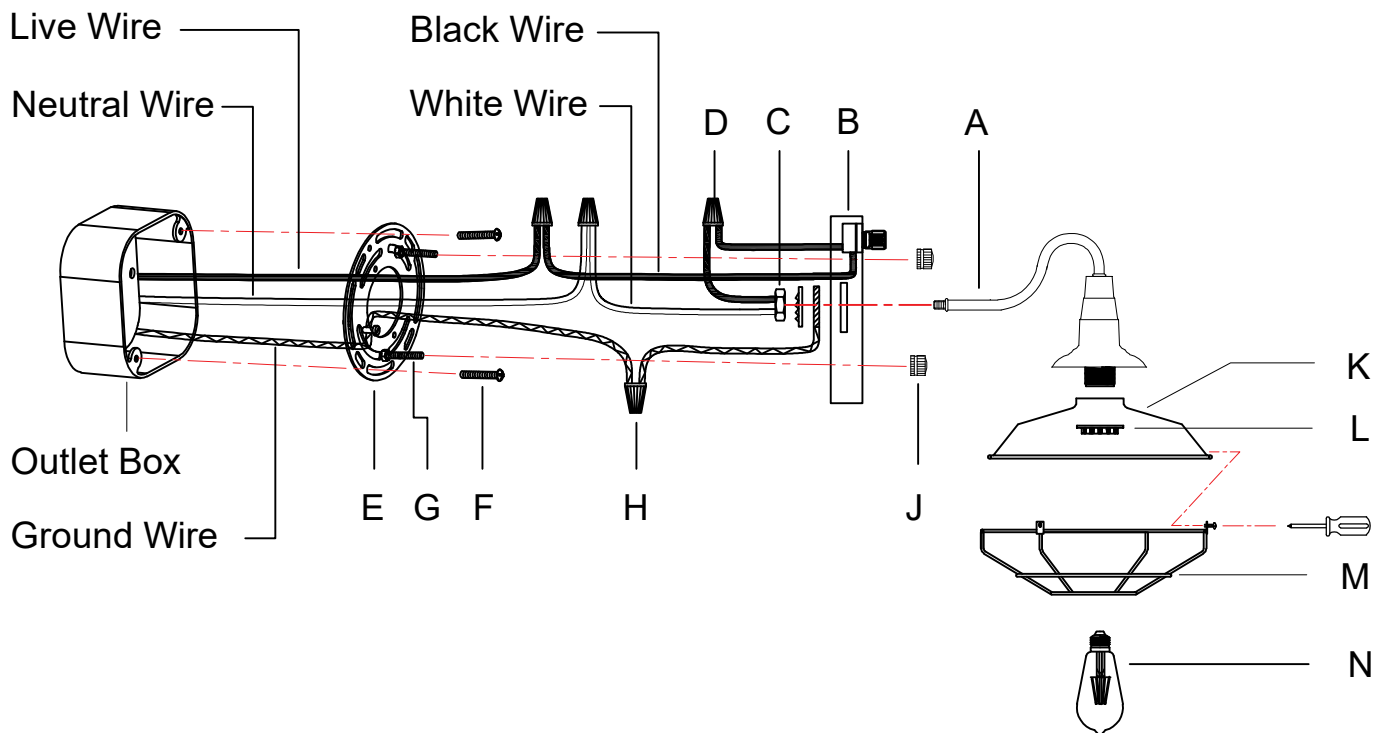

Recommended bulb shape

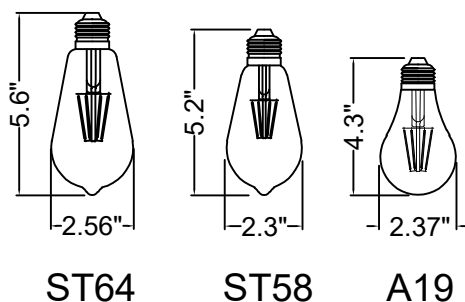

(ST64)

(Bulb not included)