


ITEM NO. :T7283-3CU

ASSEMBLY INSTRUCTIONS

- 1.Pass the wires through the connecting rod (B), screw the rod into the threaded tube on the lamp body (A), and screw the canopy (C) into the connecting rod.
- 2.Attach the connecting rods (E) to the lampshade using the screws(D) to secure.
- 3.Put the diffuser (F) into the lampshade slantwise at 15 to 25 degrees of angle.
- 4.Attach the lampshade (G) to the threaded tube on the connecting rods (E) using the nuts (H) to secure.
- 5.Put the diffuser (J) into the lampshade slantwise at 15 to 25 degrees of angle.
- 6.Install the mounting plate (K) on the outlet box with the screws (L).
- 7.Loosen the hex nuts around the bolts (M) and screw in or unscrew the bolts from the junction box to get the right length for installation.
- 8.Connect the fixture wire to the circuit wire with the wire nuts (N): black wire with live wire,white wire with neutral wire, ground wire with ground wire. Turn the wire nuts to twist the wires together. Wrap the wire nuts with insulated rubber tape.
- 9.Fix the lamp body (C) to the mounting plate (K) with the ball nuts (O).
- 10.Screw the bulb (P) into the lamp holder.

Please consult a qualified Electrician if you are not familiar with electrical wiring.

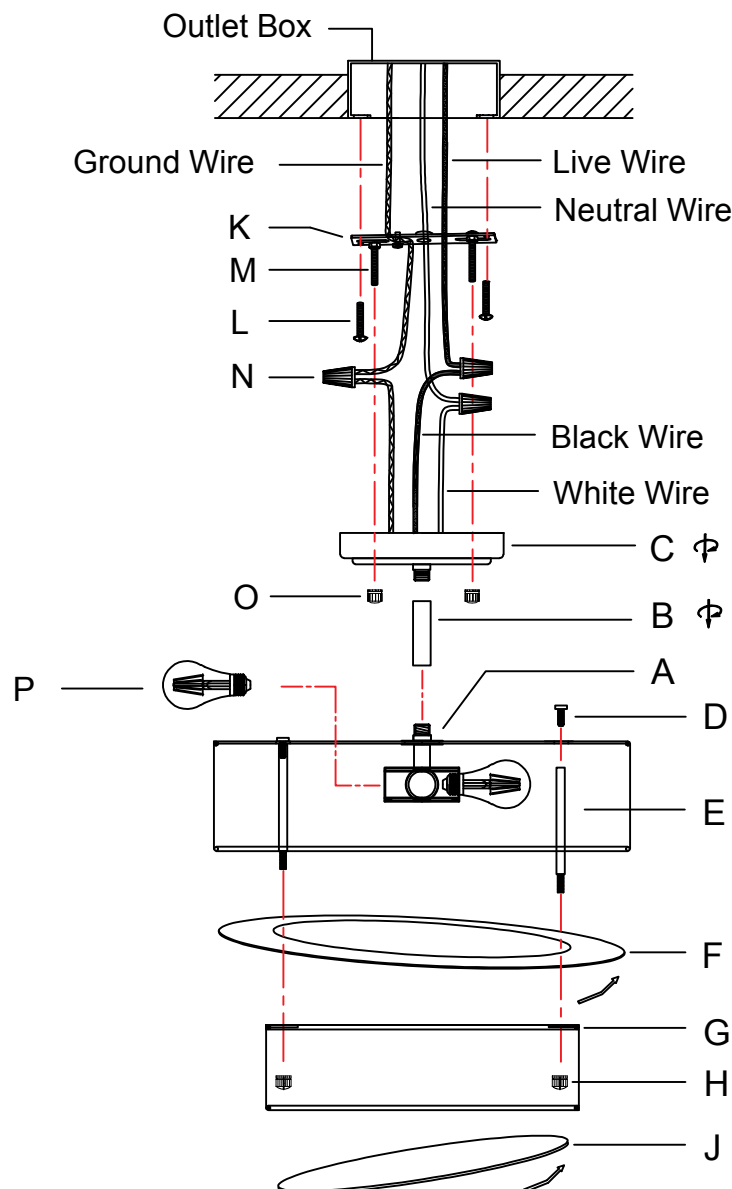

Do not overly bend the diffuser so as not to break it.