


ITEM NO. : B5178-3DU

ASSEMBLY INSTRUCTIONS

1. Pass the wires through the connecting rod (H), screw the connecting rod into the threaded tube on the lamp holder (G), and screw the rod into the canopy (J).
2. Install the mounting plate (K) on the outlet box with the screws (L).
3. Loosen the hex nuts around the bolts (M) and screw in or unscrew the bolts from the junction box to get the right length for installation.
4. Connect the fixture wire to the circuit wire with the wire nuts (N): black wire with live wire, white wire with neutral wire, ground wire with ground wire. Turn the wire nuts to twist the wires together. Wrap the wire nuts with insulated rubber tape.
5. Fix the canopy (J) to the mounting plate (K) with the ball nuts (O).
6. Put the porous circular cover (P) and the glass shade (Q) around the lampholder and secure the glass shade by screwing the socket ring (R) into the the lampholder.

Please consult a qualified Electrician if you are not familiar with electrical wiring.

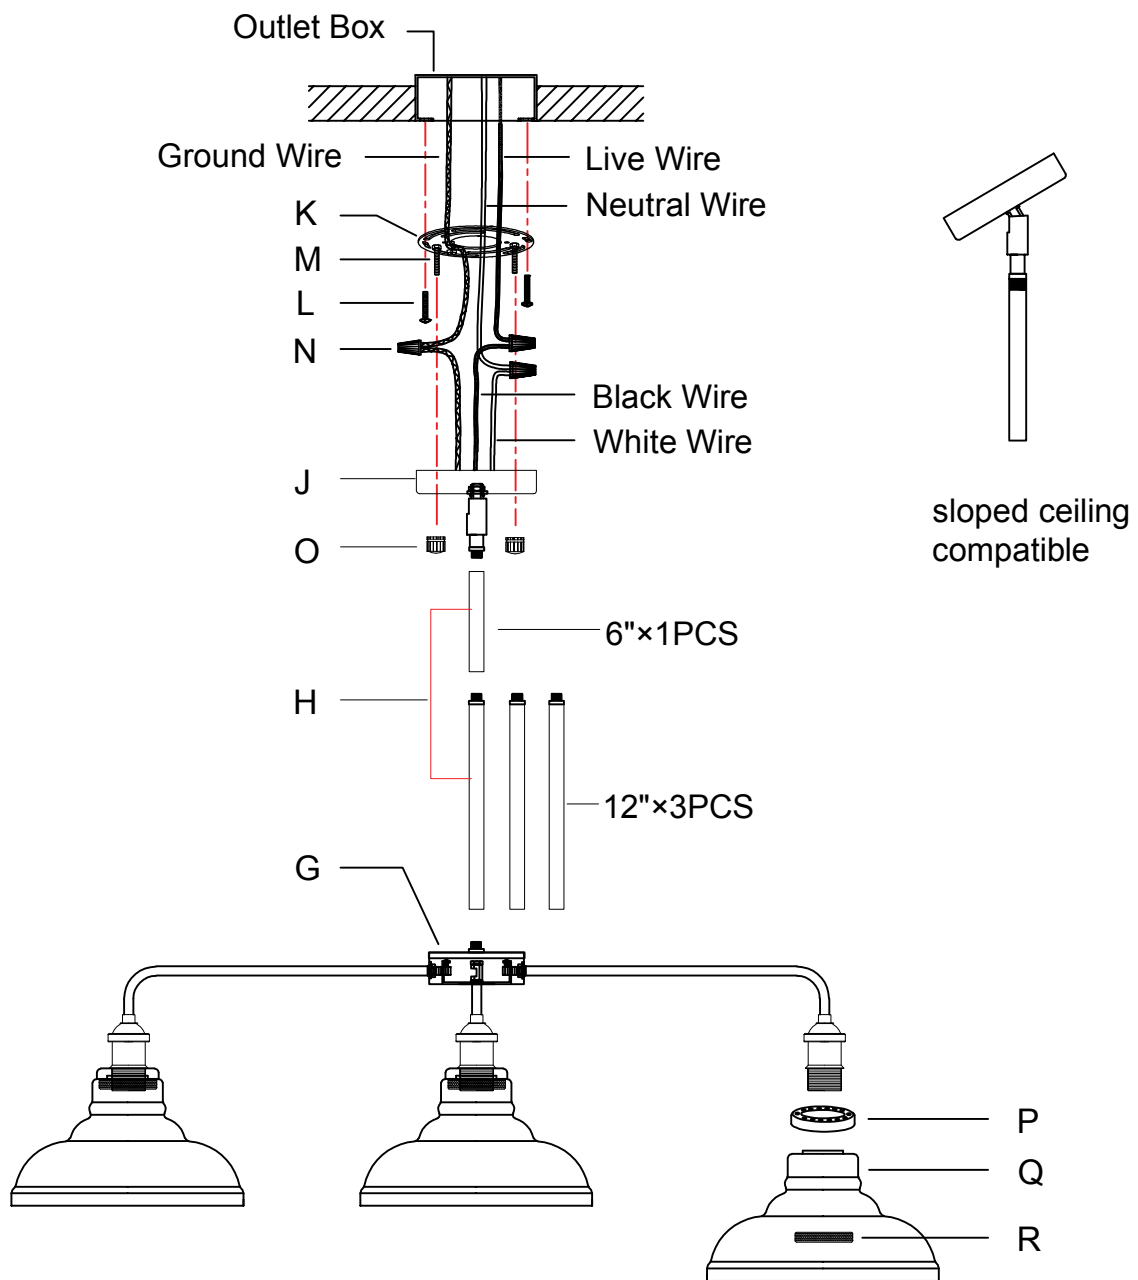

In view of thermal expansion and contraction, avoid securing the glass shade too tight when screwing the socket ring into the lamp holder, or you will break the glass shade.