



CAUTION

- Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.
- Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

TOOLS REQUIRED



Ladder



Safety glasses



Electrical tape




Phillips screwdriver




Flat blade screwdriver




Pliers




Wire strippers




Fixture




Shade

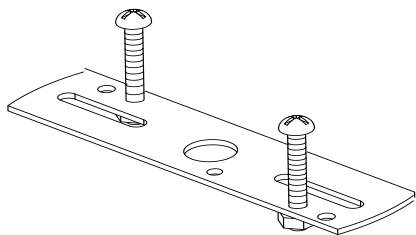

Mounting Unit



Mounting Screws



Wire Nuts


***PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE**

FLUSHMOUNT

Assembly Instructions

STEP 1

Use the **mounting screws** to attach the **mounting unit** to the junction box

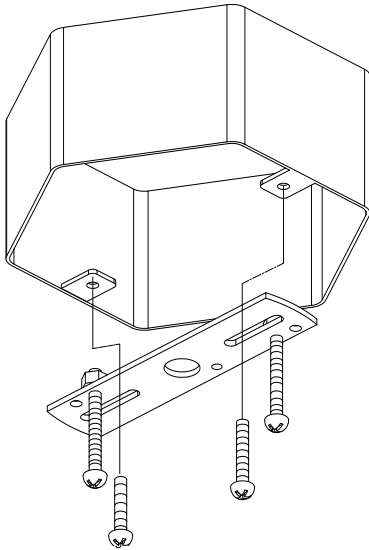


STEP 2

Make the electrical connection from the junction box to the **fixture**. Connect the ground wire to the **mounting unit** using the preinstalled green ground screw. Then, connect the positive, negative and ground wires with the supplied **wire nuts**. Secure with electrical tape

Connect the black fixture wire to the black supply wire with a wire nut.

Connect the white fixture wire to the white supply wire with a wire nut.

Connect the copper ground wire to the green ground wire with a wire nut.

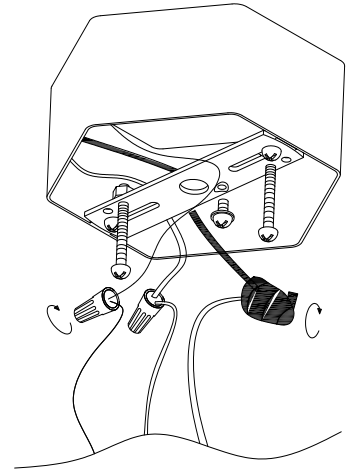

STEP 3

Install the bulb and tighten the glass by pressing it upwards
E12 1Light 60W Type B not Included bulbs.

