


# ITEM NO:T7234CU

## ASSEMBLY INSTRUCTIONS



- 1.Pass the wires through the connecting rod (B), screw the rod into the threaded tube on the lamp body (A), and screw the canopy (C) into the connecting rod.
- 2.Screw the threaded tube (D) into the joint nut inside the lampshade and secure the tube with a nut. (Note: the part of threaded tube that is screwed into the lampshade can't be too long otherwise it will press against the wires.)
- 3.Adjust the positioning nut (E) to the bottom of the lampshade and put the iron washer and silicon washer around the threaded tube one by one.
- 4.Put the diffuser (F) into the lampshade at an angle of 15 to 30 degrees, put the silicon washer around the threaded tube, and secure the diffuser with the nut (G).
- 5.Install the mounting plate (H) on the outlet box with the screws (J).
- 6.Loosen the hex nuts around the bolts (K) and screw in or unscrew the bolts from the junction box to get the right length for installation.
- 7.Connect the fixture wire to the circuit wire with the wire nuts (L): black wire with live wire, white wire with neutral wire, ground wire with ground wire. Turn the wire nuts to twist the wires together. Wrap the wire nuts with insulated rubber tape.
- 8.Fix the lamp body (C) to the mounting plate (H) with the ball nuts (M).

*Please consult a qualified Electrician if you are not familiar with electrical wiring.*




3000K 4500K 5500K

The LED color temperature can be adjusted before installing the lamp.

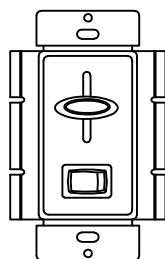

Dimmer  
(NOT included in the package)

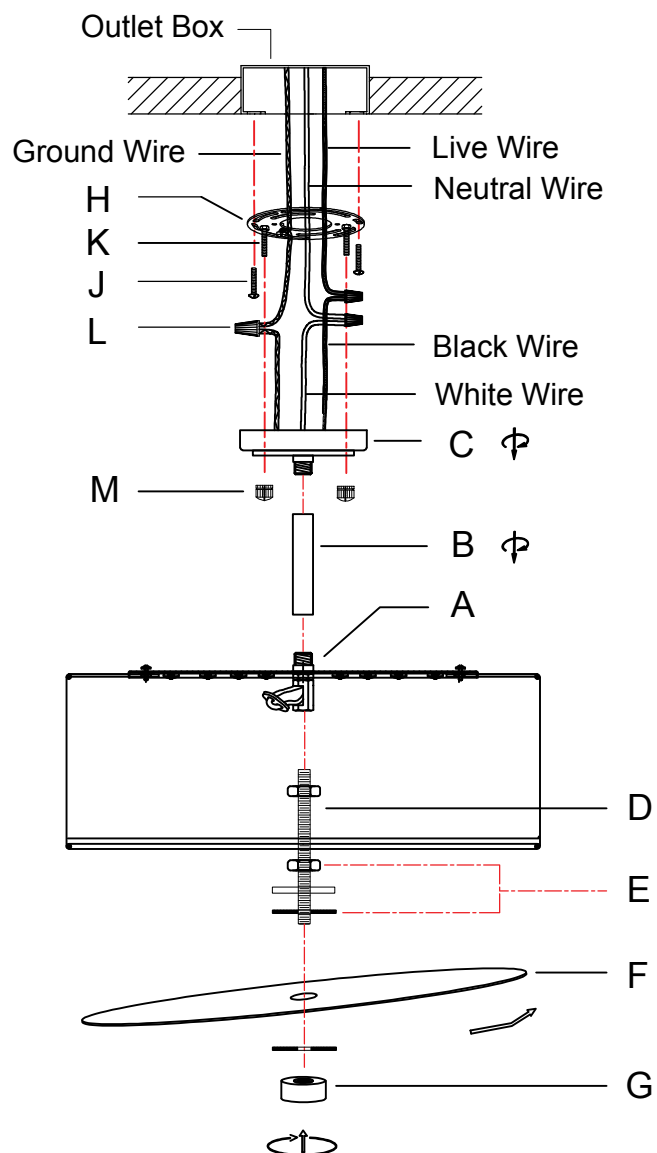

1.The ceiling light is fully dimmable with a compatible dimmer and its dimming range is from 100% down to 10%.

2.The dimming effect varies with the brands of dimmers and the recommended brand is Lutron.