


# ITEM NO. : B5315-6DU-J-N


## ASSEMBLY INSTRUCTIONS

1. Fix the lamp body (A) to the canopy (B) and secure with the nut (C).
2. Connect the circuit wires (D): black wire with black wire and white wire with white wire. Turn the wire nuts to twist the wires together. Wrap the wire nuts with insulated rubber tape and manage the wires with wire wrap straps.
3. Attach the break (E) to the threaded tube of the lamp body using the nut (F) to secure.
4. Pass the wires through the connecting rod (G) and screw the rod into the lamp body. (It comes with 5 12-inch rods and adjust the hanging height according to your lighting needs.)
5. Pass the wires through the canopy (H) and screw the canopy into the connecting rod.
6. Install the mounting plate (J) on the outlet box with the screws (K).
7. Loosen the hex nut around the bolts (L) and screw in or unscrew the bolts from the junction box to get the right length for installation.
8. Connect the fixture wire to the circuit wire by wire nuts (M), black wire with live wire, white wire with neutral wire, ground wire with ground wire.
9. Fix the lamp body (H) to the mounting plate (J) with the ball nuts (N).
10. Screw the bulb (O) into the lamp holder.
11. Screw the lampshade (P) into the bobèche gently.

*Please consult a qualified Electrician if you are not familiar with electrical wiring.*

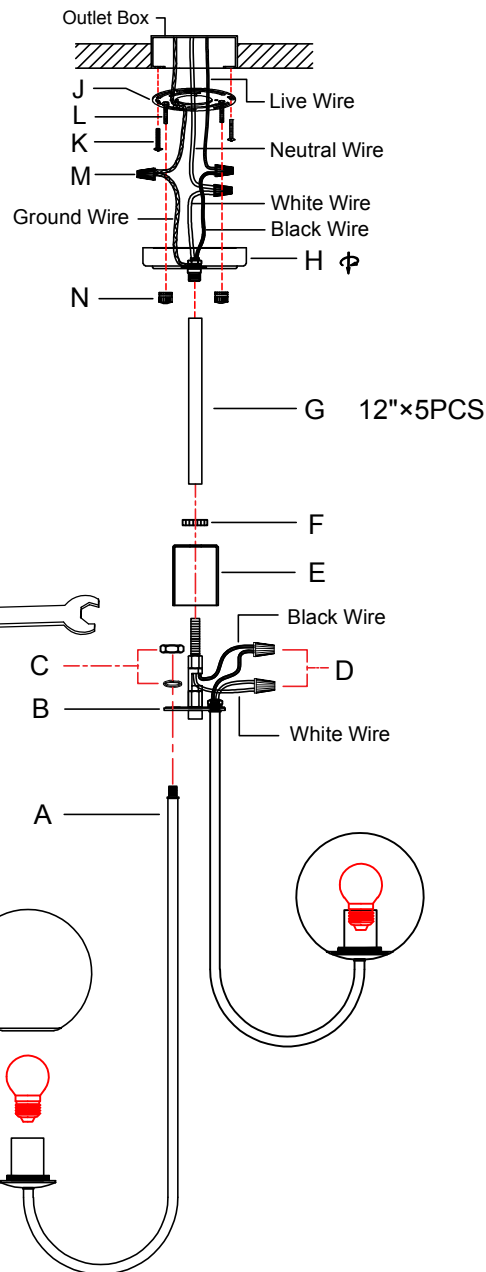

### Recommended bulb shape

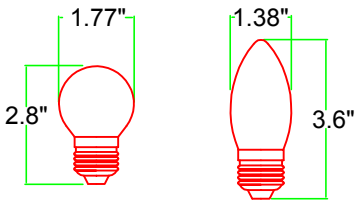


G45

B11

Max. Size of Bulb:

1.77 Inches Width \* 3.6 Inches Height

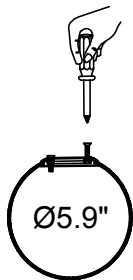

Tighten the screws before installing the glass globe. Note: Do not over tighten the screws or you will potentially break the glass.

