


ITEM NO:T7285-3CU

ASSEMBLY INSTRUCTIONS

1. Attach the wavy arms (A) to the canopy (B) using the nuts (C) to secure. (Note: please adjust the spacing of three wavy arms to create a three-pronged pattern before securing the nuts.)
2. Pass the wires through the connecting rod (E) and screw the lamp holder (D) into the connecting rod (E).
3. Align the screw holes on the lampshade (F) with those on the wavy arms (A) and secure the lampshade with the screws (G).
4. Install the mounting plate (H) on the outlet box with the screws (J).
5. Connect the fixture wire to the circuit wire with the wire nuts (K): black wire with live wire, white wire with neutral wire, ground wire with ground wire. Turn the wire nuts to twist the wires together. Wrap the wire nuts with insulated rubber tape.
6. Fix the canopy (B) to the mounting plate (H) with the screws (L).
7. Screw the bulb (M) into the lamp holder.
8. Put the diffuser (N) into the lampshade slantwise at 15 to 30 degrees of angle.

Please consult a qualified Electrician if you are not familiar with electrical wiring.

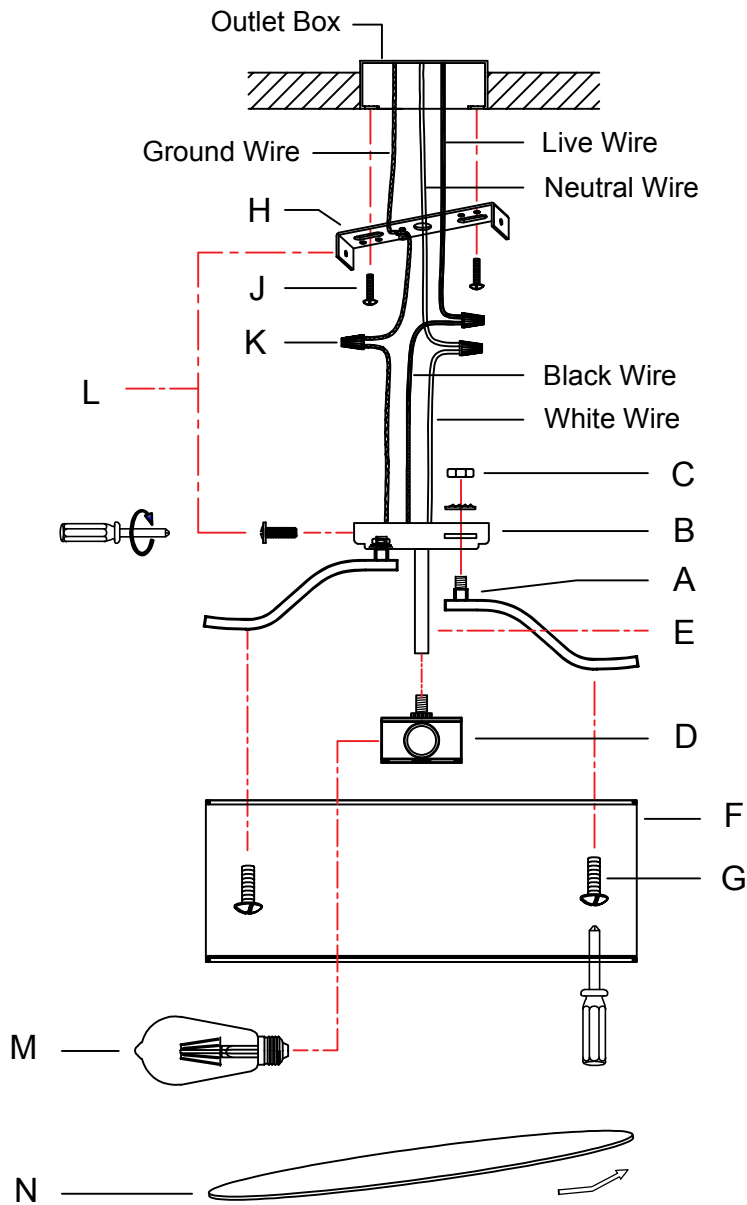

Do not overly bend the diffuser so as not to break it.