
ITEM NO.: T3245BU-BK2-C

ASSEMBLY INSTRUCTIONS

- 1. Install the mounting plate (A) on the outlet box by using the screws (B).
- 2. Connect the fixture wire to the circuit wire by wire nuts (C), black wire with live wire, white wire with neutral wire, ground wire with ground wire.
- 3. Fix the lamp body (D) to the mounting plate (A) with the ball nuts (E).
- 4. Place the lamp shade (F) on the socket and tighten it with the socket ring (G).
- 5. Screw the bulb (H) into the lamp holder.

Please consult a qualified Electrician if you are not familiar with electrical wiring.

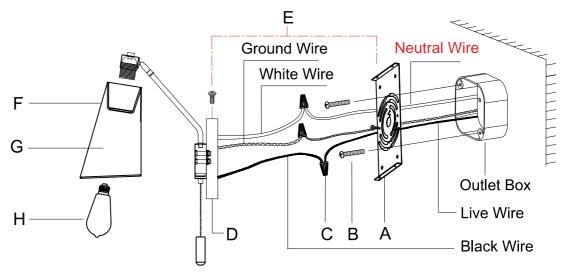

Installation Process With a Junction Box

Installation Process Without a Junction Box

- 1.Drill holes on the wall according to size of drywall anchors and gently tap the plastic drywall anchors (A) into the hole with a hammer.
- 2.Align the holes on the mounting plate with those on the wall. Drill a deep hole for the green screw securing the ground wire (E).
- 3. Attach the the mounting plate (B) to the wall and secure it with self-tapping screws (C).
- 4. Wrap a few loops of the ground wire (E) around the green screw tightly.
- 5.Pass the power cord (D) through the hole on the canopy and fasten the cord with an 8-shaped fastener. Connect the fixture wire to the mains wire with wire nuts, black wire with black wire and white wire with white wire.

