
## ITEM NO:T7233CU

## **ASSEMBLY INSTRUCTIONS**


- 1. Screw the connecting rod (B) into the lampshade (A) and screw the canopy (C) into the connecting rod (B).
- 2. Screw the metal rods (D) into the threaded tube inside the lampshade (A).
- 3. Attach the diffuser (E) to the top of fabric shade (F) and secure the fabric shade with the nuts (G).
- 4. Put the diffuser (H) into the fabric shade (F) at an angle.
- 5.Install the mounting plate (J) on the outlet box by using the screws (K).
- 6.Loosen the hex nuts around the bolts (L) and screw in or unscrew the bolts from the junction box to get the right length for installation.
- 7. Connect the fixture wire to the circuit wire by wire nuts (M), black wire with live wire, white wire with neutral wire, ground wire with ground wire.
- 8. Fix the lamp body (C) to the mounting plate (J) by the ball nuts (N).


Please consult a qualified Electrician if you are not familiar with electrical wiring.



3000K 4500K 5500K

The LED color temperature can be adjusted before installing the lamp.



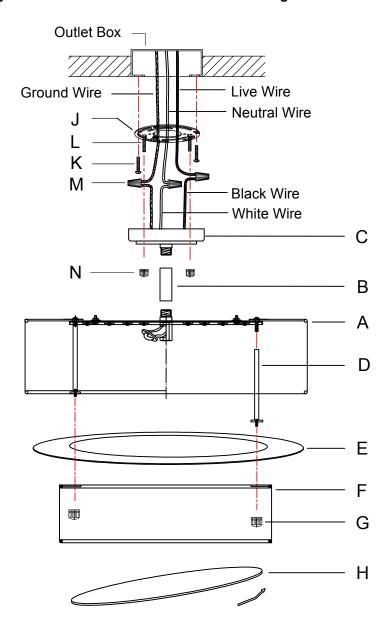

- 1. The ceiling light is fully dimmable with a compatible dimmer and its dimming range is from 100% down to 10%.
- 2. The dimming effect varies with the brands of dimmers and the recommended brand is Lutron.